



Dishwashing

EVO Generation - Concept

DISHWASHER CO-501 COLD

<u>DIMENSIONS</u>		Article	Packed
Length	mm	600,00	690,00
Depth	mm	600,00	775,00
Height	mm	830,00	1.105,00
Weigth	Kg	60,00	67,00
Volumen	m3	0,30	0,46
<u>ELECTRICITY</u>			
<u>Electric power</u>	KW		6,20
230V -1+N			2x6+T - 40 A
230V - III			3x2,5+T - 25 A
400V - III+N			4x2,5+T - 20 A
<u>WATER</u>			
Water consumption (lit/h)			72,00
Pressure (Kg/cm2)			2 ÷ 4
<u>GAS</u>			
Not used			
<u>STEAM</u>		Not used	
<u>AIR</u>		Not used	
<u>LEVEL SOUND</u>		(dB)	63,00

DISHWASHER CO-501 COLD

Front loading dishwasher - EVO Generation - Concept.

Hourly production: 720 dishes/hour.

Useful loading height: 380 mm.

Maximum diameter of dishes: Ø 320 mm.

Wash cycles: 90"-180".

Push button for an optional cold rinse at the end of the cycle.

Made of stainless steel.

Full Double skin body to isolate machine's noise from the environment . The door has double skin with special pressed isolation material, and stamped finishing to improve noise isolation and to keep the heat inside the machine. Rock counterbalanced door. Double spring and stainless steel hinge system. The case allows the placement of the machine under surfaces of 850 mm height.

Double rotating wash and rinse systems, above and below.

Heating elements in tank and boiler.

Tank with 2.8 kW heating element.

Tank capacity: 20 litres.

Boiler with multipower heating elements: 1,8 / 2,8 / 3,7 / 5,6 kW.

Water consumption: 2.4 litres/rinse.

Thermostatic temperature control: washing at 60°C and rinsing at 90°C.

Thermo stop system that guarantees minimum rinsing temperature of 85°C.

Security thermostats.

Anti - return protection system.

Built-in automatic rinse dispenser.

Safety switch for door opening.

Adjustable legs.


Water protection rating: IPX4


Total power: multipower 2,4 / 3,4 / 4,3 / 6,2 kW.

Dimensions: 600 x 600 x 830 mm.

Baskets equipment: 1 x CT-10, 1 x CP-16/18 and 4 cutlery containers.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	210	50	65		
SOFT COLD WATER	305	50	65	3/4"	
DRAIN	370	50	65	30 x 25	



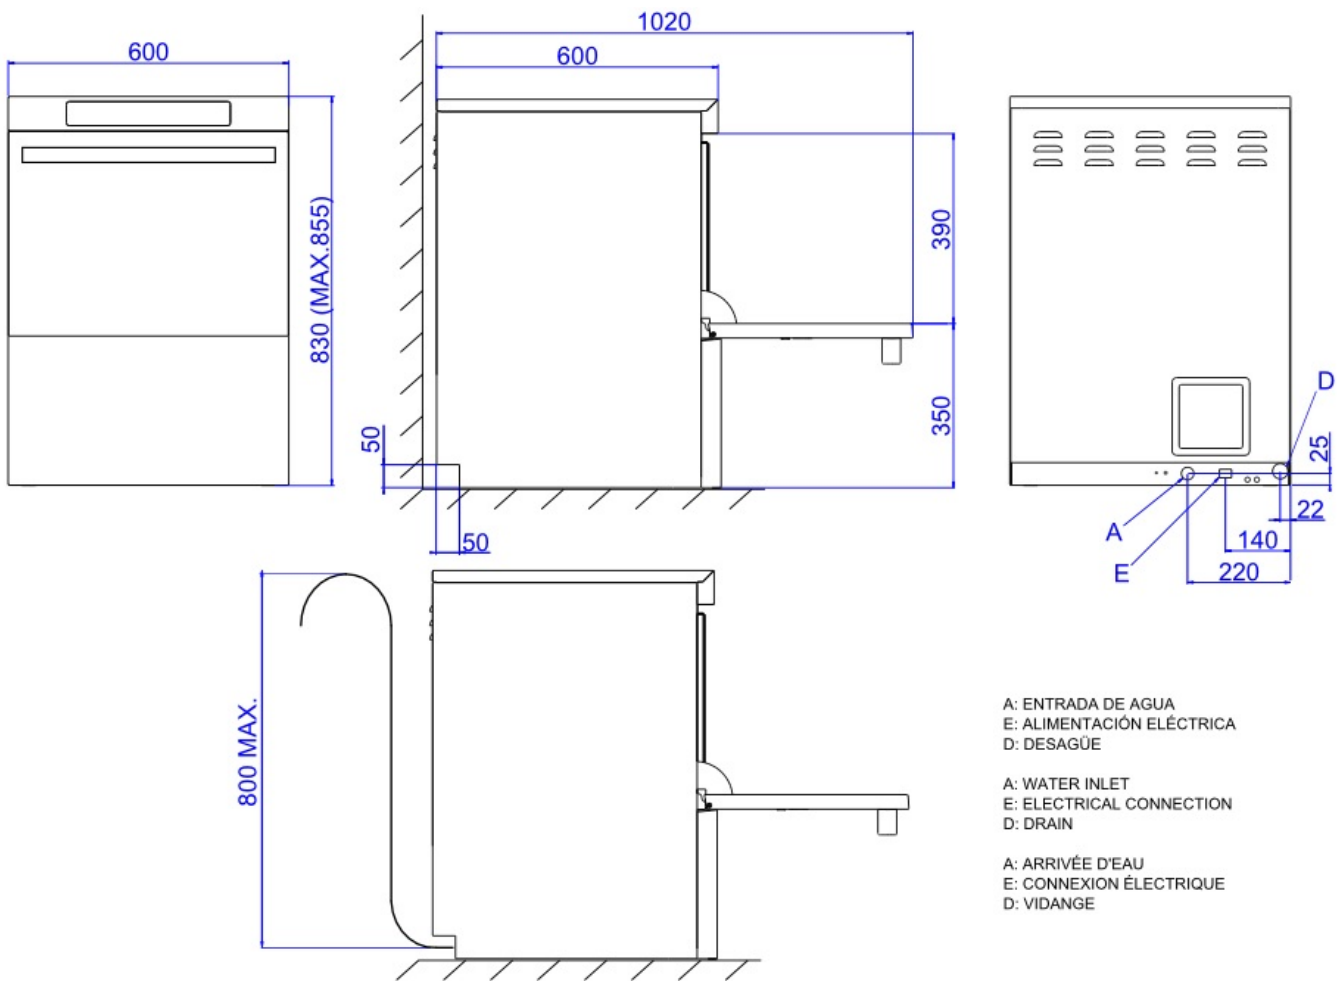

A: ENTRADA DE AGUA
E: ALIMENTACIÓN ELÉCTRICA
D: DESAGÜE

A: WATER INLET
E: ELECTRICAL CONNECTION
D: DRAIN

A: ARRIVÉE D'EAU
E: CONNEXION ÉLECTRIQUE
D: VIDANGE